

Alpeth

Conductor Solid annealed copper
Insulation Colour coded high molecular weight solid polyolefin


Jacket Black, polyethylene

Shield Electrically continuous, flat aluminum tape applied longitudinally, with an overlap. Tape is coated on both sides providing corrosion resistance and a complete bond to the jacket inhibiting moisture from entering the core.

Core Wrap Non-hygroscopic high dielectric strength tape.

Approvals RoHS compliant

Applications Designed for underground duct or aerial installation

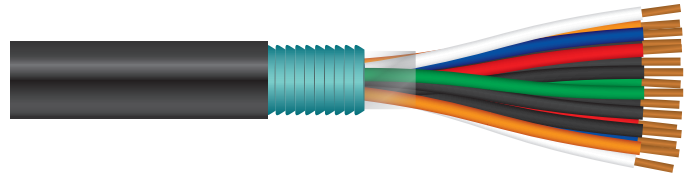

Prod Code	AWG Size	# of Pairs	Nominal Diameter		Approx. Weight lbs/kft (kg/km)
			In	mm	
37A2406	24	6	.35	8.9	50 (75)
37A2412	24	12	.40	10.0	75 (110)
37A2425	24	25	.51	13.0	125 (185)
37A2450	24	50	.64	16.0	215 (320)
37A24100	24	100	.83	21.0	385 (575)
37A24200	24	200	1.09	28.0	705 (1050)
37A2212	22	12	.46	12.0	100 (150)
37A2225	22	25	.60	15.0	180 (270)
37A2250	22	50	.75	19.0	310 (460)
37A1906	19	6	.48	12.0	105 (155)
37A1912	19	12	.57	15.0	170 (255)
37A1925	19	25	.76	19.0	210 (460)
37A1950	19	50	1.00	25.0	575 (855)

ALPETH.pdf