


ARMM Series Riser Category 3

Product Description The AR Series Riser Cables are intended for vertical and horizontal distribution in commercial buildings and meet Category 3 electrical specifications. This includes all applications except those in plenums.

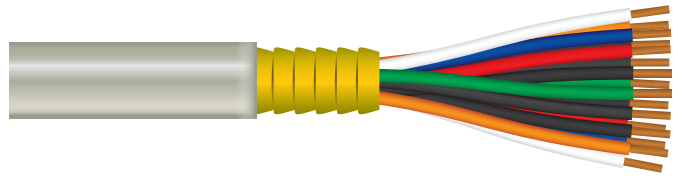

Conductor Solid annealed copper
Insulation Polyethylene foam with PVC skin, Colour Code 5
Jacket Grey, flame retardant, weather and abrasion resistant PVC
Shield Corrugated 8mil Aluminum Tape
Approvals UL444
 UL Listed CMR (UL 1666)
 ANSI/TIA/EIA-568-B.2 CAT 3
 RoHS- compliant

Product Code	AWG Size	Pair Count	Nominal Diameter in (mm)	Nominal Impedance (ohms)	Nominal Velocity of Prop. (%)	Approx. Weight lbs/kft (kg/km)
37SA2425	24	25	0.51 (13)	100 ± 15	60	146 (218)
37SA2450	24	50	0.64 (16)	100 ± 15	60	241 (360)
37SA24100	24	100	0.89 (23)	100 ± 15	60	447 (667)
37SA24400	24	400	1.53 (39)	100 ± 15	60	1,427 (2,128)

CAT3_ARMM.pdf