


Broadband Backbone Category 5

Conductor Solid annealed copper
Insulation Solid Polyolefin, Colour Code 5
Jacket Black, sunlight and weather resistant polyethylene

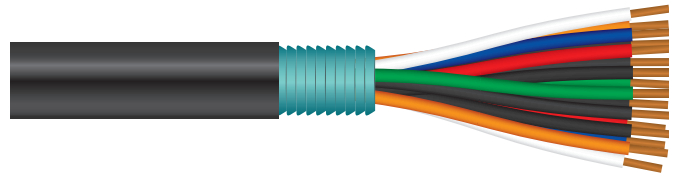

Shield Electrically continuous 0.20 mm polymer coated corrugated aluminum tape, applied with an overlap and covered with an outer electrically continuous polymer coated corrugated steel tape applied with an overlap, both tapes are flooded.

Core Wrap Non-hygroscopic dielectric tape

Approvals ANSI/TIA/EIA-568-B.2
 ANSI/TIA-568-C.2
 RoHS-compliant

Applications Ideal for direct burial, underground and lashed aerial applications. This cable provides an extension of the LAN beyond the premises.

Product Code	AWG Size	Pair Count	Nominal Diameter in (mm)	Nominal Impedance (ohms)	Nominal Velocity of Prop. (%)	Approx. Weight lbs/kft (kg/km)
37G2425	24	25	0.68 (17.3)	100 ± 15	62	258 (385)

CAT5_BB_BB.pdf