


Multi-Conductor Station Z - PLENUM (UNSHIELDED) CSA/FT6

- Conductor** Solid bare copper
- Insulation** 300V PVC insulation
- Jacket** Grey and White PVC
- Temperature** 60°C
- Approvals** UL listed CMP to harmonized standard C22.2 No.214 and UL 444
Passes CSA/FT6 flame and smoke test
Passes UL 910 flame and smoke test
- Applications** Low voltage applications, remote controls, computer system interface, indoor/outdoor communication systems, and signal applications.

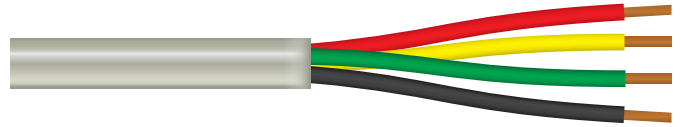

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
42LA2204	22	4	Solid	0.008	0.015	0.127	15	9

Chart No. 9 Multi-Conductor

Cond. #	Colour
1	Red
2	Green
3	Yellow
4	Black
5	White
6	Blue
7	Orange
8	Brown
9	Purple
10	Grey
11	Pink
12	Tan

MC_STN_Z_P.pdf