


MULTI-CONDUCTOR STRANDED UNSHIELDED

CSA/FT4/UL

- Conductor** Stranded tinned copper
- Insulation** 600V Colour coded semi-rigid PVC
- Jacket** Grey PVC
- Temperature** -20°C to 105°C
- Approvals** CSA Certified CMG/UL listed to CM harmonized standard C22.2 No. 214 and UL 444
 Certified to CSA C22.2 No. 210.2 - Type AWM
 Passes CSA/FT4 vertical flame test
 Passes UL 70,000 BTU vertical flame test
 75°C UL listed CMR (Riser) also available

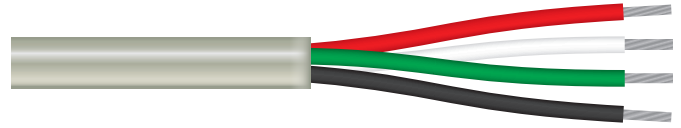

Applications For use in PA systems, unbalanced intercom systems, interconnecting cables, remote control circuits, low voltage, broadcast and studio use, temperature control systems.

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35A2202	22	2	7/30	0.008	0.015	0.130	9	Black/Red
35A2203	22	3	7/30	0.008	0.015	0.138	12	Black/Red/Green
35A2204	22	4	7/30	0.008	0.015	0.150	15	1
35A2205	22	5	7/30	0.008	0.023	0.180	21	1
35A2206	22	6	7/30	0.008	0.023	0.194	25	1
35A2207	22	7	7/30	0.008	0.023	0.194	28	1
35A2208	22	8	7/30	0.008	0.023	0.209	31	1
35A2210	22	10	7/30	0.008	0.023	0.238	38	1
35A2212	22	12	7/30	0.008	0.023	0.249	45	1
35A2215	22	15	7/30	0.008	0.023	0.267	54	2
35A2220	22	20	7/30	0.008	0.023	0.297	70	2
35A2225	22	25	7/30	0.008	0.030	0.350	91	2
35A2230	22	30	7/30	0.008	0.030	0.370	106	2
35A2240	22	40	7/30	0.008	0.030	0.411	137	2
35A2250	22	50	7/30	0.008	0.030	0.452	169	2
35A2002	20	2	7/28	0.009	0.015	0.150	13	1
35A2003	20	3	7/28	0.009	0.015	0.159	18	1
35A2004	20	4	7/28	0.009	0.023	0.190	25	1
35A2005	20	5	7/28	0.009	0.023	0.206	30	1
35A2007	20	7	7/28	0.009	0.023	0.224	40	1
35A2009	20	9	7/28	0.009	0.023	0.259	50	1
35A2012	20	12	7/28	0.009	0.023	0.281	60	1
35A2015	20	15	7/28	0.009	0.030	0.327	84	2
35A2019	20	19	7/28	0.009	0.030	0.352	103	2
35A2025	20	25	7/28	0.009	0.030	0.410	133	2

Continued on Next Page

MULTI-CONDUCTOR STRANDED UNSHIELDED

CSA/FT4/UL

Continued from Previous Page

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35A1802	18	2	16/30	0.012	0.023	0.197	21	1
35A1803	18	3	16/30	0.012	0.023	0.209	28	1
35A1804	18	4	16/30	0.012	0.023	0.227	35	1
35A1805	18	5	16/30	0.012	0.023	0.248	43	1
35A1807	18	7	16/30	0.012	0.023	0.270	57	1
35A1809	18	9	16/30	0.012	0.030	0.328	76	1
35A1812	18	12	16/30	0.012	0.030	0.368	99	2
35A1815	18	15	16/30	0.012	0.030	0.397	120	2
35A1819	18	19	16/30	0.012	0.030	0.429	148	2
35A1825	18	25	16/30	0.012	0.032	0.506	194	2
35A1830	18	30	16/30	0.012	0.032	0.536	229	2
35A1840	18	40	16/30	0.012	0.050	0.635	319	2
35A1602	16	2	26/30	0.015	0.023	0.235	31	1
35A1603	16	3	26/30	0.015	0.023	0.250	42	1
35A1604	16	4	26/30	0.015	0.023	0.273	53	1
35A1605	16	5	26/30	0.015	0.023	0.300	65	2
35A1606	16	6	26/30	0.015	0.030	0.341	82	2
35A1607	16	7	26/30	0.015	0.030	0.341	92	2
35A1609	16	9	26/30	0.015	0.030	0.397	117	2
35A1612	16	12	26/30	0.015	0.030	0.448	151	2
35A1615	16	15	26/30	0.015	0.032	0.488	187	2
35A1619	16	19	26/30	0.015	0.035	0.524	250	2
35A1625	16	25	26/30	0.015	0.050	0.658	323	2

Chart No. 1 Multi-Conductor

Cond. #	Colour
1	Black
2	White
3	Red
4	Green
5	Brown
6	Blue
7	Orange
8	Yellow
9	Purple
10	Grey
11	Pink
12	Tan

Chart No. 7 Multi-Conductor

Cond. #	Colour
1	Black
2	Red
3	White
4	Green
5	Orange
6	Blue
7	Brown
8	Yellow
9	Purple
10	Grey
11	Pink
12	Tan

Continued on Next Page

MULTI-CONDUCTOR STRANDED UNSHIELDED

CSA/FT4/UL

Continued from Previous Page

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35A1402	14	2	41/30	0.020	0.023	0.283	45	1
35A1403	14	3	41/30	0.020	0.030	0.316	67	1
35A1404	14	4	41/30	0.020	0.030	0.345	85	1
35A1405	14	5	41/30	0.020	0.030	0.379	103	2
35A1407	14	7	41/30	0.020	0.030	0.413	139	2
35A1412	14	12	41/30	0.020	0.032	0.552	232	2
35A1415	14	15	41/30	0.020	0.050	0.633	306	2
35A1202	12	2	65/30	0.030	0.030	0.378	76	1 or 7
35A1203	12	3	65/30	0.030	0.030	0.403	105	1
35A1204	12	4	65/30	0.030	0.030	0.442	135	1
35A1002	10	2	105/30	0.030	0.030	0.457	113	1

Chart No. 2 Multi-Conductor

Cond. #	Colour
1	Black
2	White
3	Red
4	Green
5	Orange
6	Blue
7	White/Black
8	Red/Black
9	Green/Black
10	Orange/Black
11	Blue/Black
12	Black/White
13	Red/White
14	Green/White
15	Blue/White
16	Black/Red
17	White/Red

Cond. #	Colour
18	Orange/Red
19	Blue/Red
20	Red/Green
21	Orange/Green
22	Black/White/Red
23	White/Black/Red
24	Red/Black/White
25	Green/Black/White
26	Orange/Black/White
27	Blue/Black/White
28	Black/Red/Green
29	White/Red/Green
30	Red/Black/Green
31	Green/Black/Orange
32	Orange/Black/Green
33	Blue/White/Orange
34	Black/White/Orange

Cond. #	Colour
35	White/Red/Orange
36	Orange/White/Blue
37	White/Red/Blue
38	Black/White/Green
39	White/Black/Green
40	Red/White/Green
41	Green/White/Blue
42	Orange/Red/Green
43	Blue/Red/Green
44	Black/White/Blue
45	White/Black/Blue
46	Red/White/Blue
47	Green/Orange/Red
48	Orange/Red/Blue
49	Blue/Red/Orange
50	Black/Orange/Red

***Note:** In cable constructions containing more than 25 pair, the colours are repeated as necessary. Colour coded binders are used to identify 25 pair groups of colour coded pairs.

MC_SU.pdf