


Multi-Pair Individually Foil Shield - PLENUM

CSA/FT6

- Conductor** Stranded tinned copper
- Insulation** 300V Low Smoke PVC
- Jacket** Beige PVC
- Temperature** 75°C
- Shields** 100% aluminum/mylar shield with stranded tinned copper drain wire for each pair.
- Approvals** UL listed CMP to harmonized standard C22.2 No.214 and UL 444
Passes CSA/FT6 flame and smoke test
Passes UL 910 flame and smoke test
- Applications** Low voltage applications, remote controls, computer system interface, communication and signal applications.

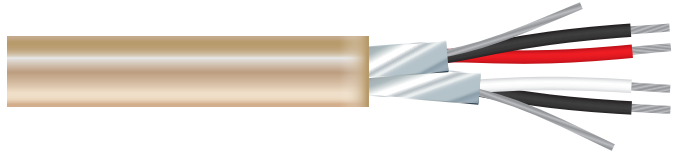

Product Code	AWG Size	# of Pairs	Strd	Drain Wire Size	Insulation Thickness (inches)	Jacket Thickness (inches)	Nom. O.D. (in.)	Cable Weight (lbs/mft)	Colour Code
42IA2202*	22	2	7/30	24	0.006	0.019	0.190	23	3
42IA2203	22	3	7/30	24	0.006	0.019	0.215	32	3

Chart No. 3 Paired

Pair #	Colour	Pair #	Colour	Pair #	Colour
1	Black & Red	11	Red & Yellow	21	White & Brown
2	Black & White	12	Red & Brown	22	White & Orange
3	Black & Green	13	Red & Orange	23	Blue & Yellow
4	Black & Blue	14	Green & White	24	Blue & Brown
5	Black & Yellow	15	Green & Blue	25	Blue & Orange
6	Black & Brown	16	Green & Yellow	26	Brown & Yellow
7	Black & Orange	17	Green & Brown	27	Brown & Orange
8	Red & White	18	Green & Orange	28	Orange & Yellow
9	Red & Green	19	White & Blue	29	Purple & Orange
10	Red & Blue	20	White & Yellow	30	Purple & Red

***Note:** In cable constructions containing more than 25 pair, the colours are repeated as necessary. Colour coded binders are used to identify 25 pair groups of colour coded pairs.

MP_ISF_P.pdf