Loop Detector Cables

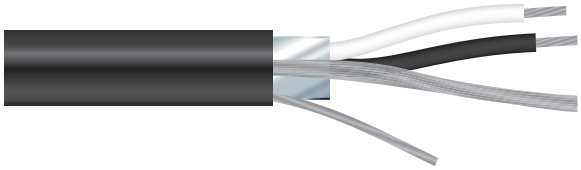

Conductor	14 AWG 19 Strand Tinned Copper - Concentric 600V
Insulation	Polyethylene
Jacket	Black Polyethylene
Temperature	-40º C to +75º C
Drain Wire	16 AWG 26 Strand Tinned Copper - Bunched
Shield Material	Aluminum/mylar
Cable Assembly	Conductors are cabled together and taped with an overall clear mylar wrap
Pair Lay Length	4" Maximum
Ripcord	Polyester ripcord included under the jacket
Approvals	Internationla Municipal Signal Association Inc.; Specification no. 50-2
ASTM Standard	ASTM B33, B8
Applications	Traffic Signal

Product Code	Cond. Size	# of Cond.	Nom. Insul. Thickness (Inches)	Nom. Jacket Thickness (Inches)	Nom. O.D. (Inches)	AMPS*	Ship. Weight lbs/mft
46BB1402	14	2	0.03	0.03	0.344	20	57
46BB1404	14	4	0.03	0.03	0.399	16	93

**As per Tabe 2 of CEC*