


FAS Fire Alarm Cable Foil Shield

Conductor Solid bare copper
Insulation 300V Colour coded PVC
Jacket Red PVC
Temperature -30°C bend to 105°C
Shield Aluminum polyester shield with 22 AWG stranded tinned copper drain wire
Packaging X 75, X 150, X 300m Spools
Approvals CSA C22.2 No. 208 Type FAS FT4, SR (Sunlight Resistant)
Applications Fire alarm systems, heating, air conditioning and thermostat controls. For use in buildings in damp or dry locations. Power circuits in accordance with NEC article 725 Class 2 and 3 circuits. Suitable for tray cable installations.



Product Code	Cond Size	# of Cond.	Cond. Strand	Nominal Insulation Thickness (inches)	Nominal Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (kgs/km)	Colour Code
39EE1802	18	2	Solid	.015	.035	.216	41	92
39EE1803	18	3	Solid	.015	.035	.229	51	92
39EE1804	18	4	Solid	.015	.035	.247	64	92
39EE1805	18	5	Solid	.015	.036	.268	75	92
39EE1602	16	2	Solid	.015	.035	.237	52	92
39EE1603	16	3	Solid	.015	.035	.250	68	92
39EE1604	16	4	Solid	.015	.035	.281	85	92
39EE1605	16	5	Solid	.015	.039	.309	103	92
39EE1402	14	2	Solid	.015	.035	.263	70	92
39EE1404	14	4	Solid	.015	.037	.311	120	92
39EE1202	12	2	Solid	.015	.037	.316	98	92

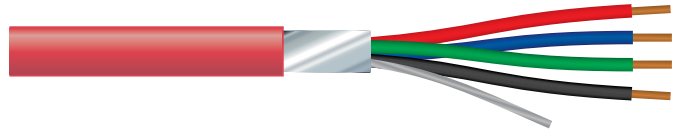