


## Station 2

CSA/FT4/UL

- Conductor** Solid bare copper
- Insulation** 300V Colour coded Polyethylene for 2C to 4C and PVC for 6C to 10C
- Jacket** Grey, White, Beige, Brown, Red or Yellow PVC
- Temperature** -20°C to 60°C
- Approvals** CSA Certified CMG or to CM harmonized standard C22.2 No.214 and UL 444
- Applications** For use as an inside connection from the drop wire, service or entrance cable to the telephone.

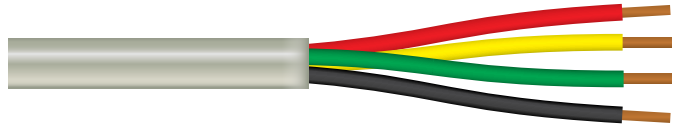

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35K2202	22	2	Solid	0.005	0.021	0.120	10	BLK/RED
35K2204	22	4	Solid	0.005	0.015	0.120	16	BLK/RED/YEL/GRN
35K2206	22	6	Solid	0.007	0.015	0.155	20	12
35K2210	22	10	Solid	0.010	0.020	0.235	33	12

## Direct Burial Station 2


- Conductor** Solid bare copper
- Insulation** 300V Colour coded semi-rigid PVC
- Jacket** Black high density Polyethylene
- Temperature** -40°C to 80°C
- Applications** For use as a direct burial drop wire, service or entrance cable.



Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35KB2204	22	4	Solid	0.007	0.020	0.139	43	BLK/RED/YEL/GRN

## Multi-Conductor Station 2 - PLENUM (UNSHIELDED) CSA/FT6

- Conductor** Solid bare copper
- Insulation** 300V PVC insulation
- Jacket** Grey and White PVC
- Temperature** 60°C
- Approvals** UL listed CMP to harmonized standard C22.2 No.214 and UL 444  
Passes CSA/FT6 flame and smoke test  
Passes UL 910 flame and smoke test
- Applications** Low voltage applications, remote controls, computer system interface, indoor/outdoor communication systems, and signal applications.

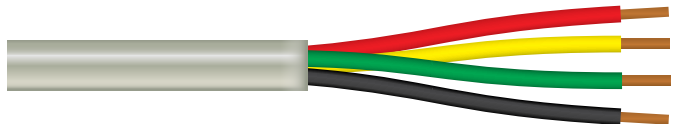

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
42LA2204	22	4	Solid	0.008	0.015	0.127	15	9